

### Overview

The EasyIO-30P-BN Controllers are rugged, network centric, high performance multi-protocols Input/Output controllers to accommodate general and specific applications, featuring BACnet® RS485, IP and Ethernet protocols plus a built-in Web server for easy configuration.

### Features:

#### Web Browser Configuration

Built-in Web server enables configuration with popular web browser over an Ethernet connection. I/O status can be monitored over the Internet connection.



#### ➤ High-Speed Data Rates

Multiple serial communication (RS485) speed selection from 9.6kbps to 76.8kbps. Supports Ethernet 10Base-T/ 100Base-T interface, half or full duplex.

#### ➤ Device ID

Complementing existing standard protocols, EasyIO-30P can be uniquely identified over the network. This facilitating online network device search and simplify reconfiguration.

#### ➤ Network Security

All configurations changes are protected via password setting, either through standard network protocol access (Bacnet) or web browser.

#### ➤ Multiple Input/Output Type


The controller has eight Digital Inputs, eight Analogue Input for current, voltage, resistance and temperature sensor, eight Digital Outputs (relay), four Analogue Output (current and voltage), and two isolated Open Collector outputs (with PWM control) for high speed switching.

#### ➤ High Accuracy Analogue Channels

High speed 14-bits A/D converter with programmable gain amplifier yields a high resolution and accuracy reading on analogue input points.

12-bits D/A provides more accurate analogue output control.

### BACnet® RS485, IP, Ethernet Web-enabled, Network Centric

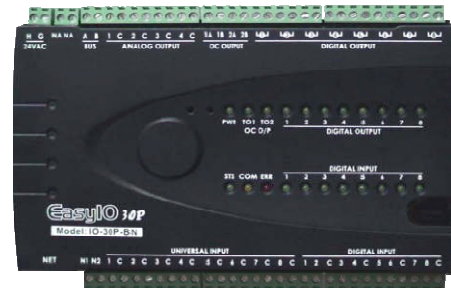

#### ➤ Programmable/Standalone Functionality

The controller can be configured to operate as standalone device. Over 40 types of programmable functions are available, typically thermostat, PID, scheduler, conversion, timer, utilities, totaliser and etc.

#### ➤ Online Help/Information

All related information/helps are available through the controller web server. Information such as registers details, wiring diagram, device specification and etc are provided to assist the user.

#### ➤ Status Indicator

Operational activity on each individual channel of DI, DO and Open Collector Outputs (PWM) are conveniently indicated by LED, so as the Power, Operation, Communication and Faults status.

#### ➤ Reset & Broadcast Switch

A Reset Switch has been provided for system reset without power removal (Warm Start operation). The Broadcast Switch allows the controller to broadcast itself to the network during installation and implementation.

#### ➤ Online Firmware Upgrade/Configuration

The controller firmware can be upgraded either through RS485 or Ethernet connection.

Network communication and operation parameters can be changed via RS485/Ethernet with the built-in boot-loader and terminal program.

#### ➤ Robust System Operation

The controller has a built-in High accuracy Real Time clock with backup battery. Software and hardware watchdog timer are provided for high reliability operation.

#### ➤ Ease of Installation

All I/Os are connected via field removable terminal block connectors for easy maintenance. The controller casing fits standard DIN rail mounting.

### Device Specifications

#### Electrical

- Power Supply: 24VAC, 3.6VA max, or 20 ~ 34VDC
- Consumption: 150mA max @ 24VDC
- Operating Temperature: 32° to 150° F (0° to 65° C)
- Storage Temperature: -4° to 150° F (-20° to 65° C)
- Operating Humidity: 10% to 95% relative humidity non-condensing

#### Communication

- Physical Interface 1 (Port 1):
  - EIA-485 (BUS A,B) Two-wire
  - Half Duplex
  - Baud Rate Speed: (9.6K, **19.2k**, **38.4K**, **76.8K bit/s**)
  - Data Bit: (**8 bits**)
  - Application Protocol: Bacnet MSTP Master
  - Multi-drop Capability: Yes (hardware ID setting) Physical
- Interface 2 (Port 2):
  - Ethernet 10/100 Base-T
  - Ethernet Support: IP,TCP,UDP,ICMP,IGMP,FTP,HTTP
  - Application Support: BACnet IP, Bacnet Ethernet

#### Input/Output Configuration

- Universal Input:
  - 8 Channels
  - Voltage: 0 - 10V (+/-0.005V) , 0 - 5V (+/- 0.003V)
  - Current: 4 - 20mA (+/-0.01mA) , 0 - 20mA (+/-0.01mA)
  - Resistance: 0 - 30K (+/-10 Ohm), 0 - 10K (+/-5 Ohm), 0 - 1.5K(+/-1 Ohm)
  - Thermistor: 10K, 10K Shunt, 1K Balco, 1K Platinum : All (+/-0.01°C)
- Digital Input:
  - 8 Channels
  - Type: Voltage Free
  - Limit: +5V at 500Ohm Resistance maximum
- Digital Output:
  - 8 Channels
  - Type: Relay Contacts, SPST NO, 48VA at 24VAC, Pilot Duty
- Transistor Output:
  - 2 Channels
  - Type: Open Collector Output, Isolation 3.75KV
  - Max Rating: 1A, 60V Analogue Output
  - 4 Channels (12 bits resolution)
  - Type: Current: 0 - 20mA, 4 - 20mA (up to 800 Ohm load), Voltage: 0 - 10V

#### Mechanical:

- Dimension: 187mm x 110mm x 47mm
- Material: UL94 ABS
- Weight: 400g

### Function Blocks

#### Input/Output

- 1) Digital Input
- 2) Digital Output
- 3) PWM Control (Open Collector Output)
- 4) Analogue Input
- 5) Analogue Output
- 6) Digital & Analogue Internal Register
- 7) Multi-state
- 8) Fan Control
- 9) Digital State Latch
- 10) Digital State Timer
- 11) Digital State Counter
- 12) Digital Input Expander

#### Loop/Process

- 13) Thermostat
- 14) Loop Control (PID)
- 15) Drive
- 16) Selection
- 17) Flow Detect
- 18) Momentary Start/Stop
- 19) Totaliser
- 20) Pulse Accumulator
- 21) Analogue Limit
- 22) Set Point Adjust
- 23) Digital Alarm
- 24) Analogue Alarm

#### Conversion

- 25) Digital to Analogue
- 26) Analogue to Digital
- 27) Analogue to Percentage
- 28) Percentage to Analogue
- 29) Scaling
- 30) Table Conversion

#### Schedule

- 31) Holiday
- 32) Scheduler
- 33) Optimum Start/Stop

#### Timer/Sequencer

- 34) Sequencer
- 35) Timer Function

#### Others

- 36) Coil Output Register Binding
- 37) Holding Register Binding

[www.infocon-technology.com](http://www.infocon-technology.com)

#### Singapore

101 Cecil Street, #09-07  
Tong Eng Building, Singapore 069533  
+65.6.325.6083 Phone  
+65.6.226.3040 Fax

#### Malaysia

32-3 Jalan Puteri 2/4, Bandar Puteri,  
47100 Puchong, Selangor D.E, Malaysia  
+60.3.8063.7571 Phone  
+60.3.8063.7572 Fax

#### Agency Listings :



LonWorks is a trademark of Echelon Corp. BACnet is a trademark of ASHRAE. Java is a trademark of Sun Microsystems. Modbus is a trademark of Schneider Electric. Vykon, JACE, AX Supervisor and Niagara Framework are trademarks of Tridium, Inc. All specifications subject to change without notice or liability to provide changes to prior purchasers. Information and specifications published here are current as of the date of publication of this document. EasyIO, reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters, Singapore. Products or features contained herein may be covered by one or more U.S. or foreign patents.

© 2006-2007 Infocon-Technology.